TOURNAMENT - FINE TURF PRECISION CYLINDER MOWER WITH POWERED GROOMER

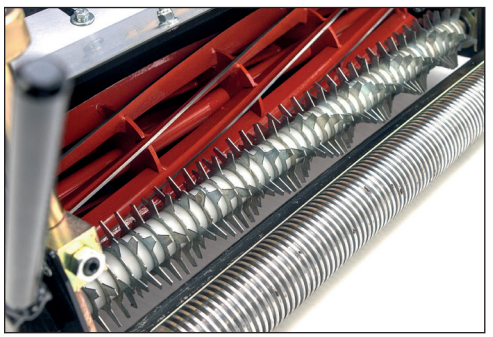

Easy to set and operate, the Tournament is equipped with an integral powered turf groomer that uses thin, closely spaced vertical blades to lift lateral grasses and “runners” immediately in front of the 10-bladed cutting cylinder.

The result is a consistently level, true and even finish, meeting the exacting requirements of sports such as bowls, cricket and golf where speed and run of the ball are key.

Engineered to operate effectively at low engine speeds the Tournament delivers low fuel consumption, noise levels and vibration.

- **A first-class fine turf mower giving a close precision cut**
- **Powered turf groomer fitted as standard (can be raised out of work very easily)**
- **Higher green speeds with higher height of cut for a healthier sward**
- **120mm (4.7”) diameter cutting cylinder with 10 blades**
- **Adjustable handlebar with anti-vibration mountings**
- **Fast, simple micro cutting height adjustment from 2.4mm – 19mm (0.1” to 0.75”)**

	TOURNAMENT 20	TOURNAMENT 24
Working width	510mm (20in)	610mm (24in)
Overall width	686mm (27in) / 902mm* (35.5in)	788mm (31in) / 1,003mm* (39.5in)
Engine	Honda GX120	Honda GX160
Power output (net)	2.6kW (3.5hp) @ 3,600 rpm	3.6kW (4.8hp) @ 3,600 rpm
Cutting cylinder	120mm (4.7in) diameter equipped with 10 blades. All-welded construction	
Bottom blade	2.4mm (0.1in) as standard 4mm (0.16in) bottom blade available on request	
Grooming reel	45 blades @ 10mm spacing	54 blades @ 10mm spacing
Height of cut	Hand adjustable from 2.4mm to 19mm (0.1in to 0.75in)	
Clip rate	246 clips/metre (225 clips/yd) irrespective of forward speed	
Handlebar	Adjustable with anti-vibration mounting	
Drive engagement	Handle-mounted lever engaging V belt drive via cable	
Cylinder engagement	Handle-mounted lever engaging V belt drive via cable (twin belts on 24in model)	
Rear roller	Two-piece aluminium with steel bevel gear differential	
Front roller	Grooved aluminium with scraper and sealed end-bearings	
Grassbox	Moulded plastic with steel reinforcing strip	
Weight	96kg (212lb)	105kg (452lb)
Overall height	1,016mm (40in)	
Overall length	1,270mm (50in)	
Optional accessories	Smooth front roller in place of grooved roller TS029 Pneumatic transport wheels and stand for Tournament 20 TS030 Pneumatic transport wheels and stand for Tournament 24	

* overall width with optional transport wheels fitted

Scan this QR code to see a video of this product in action- see back page for details.